

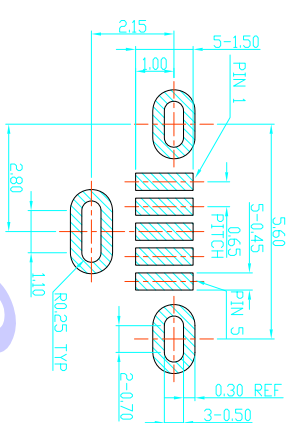
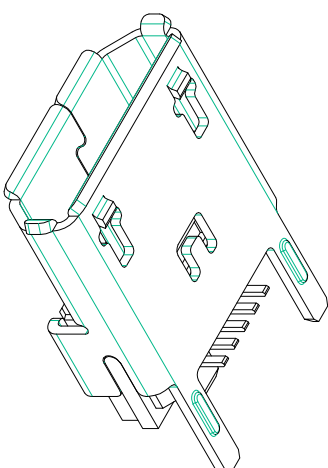
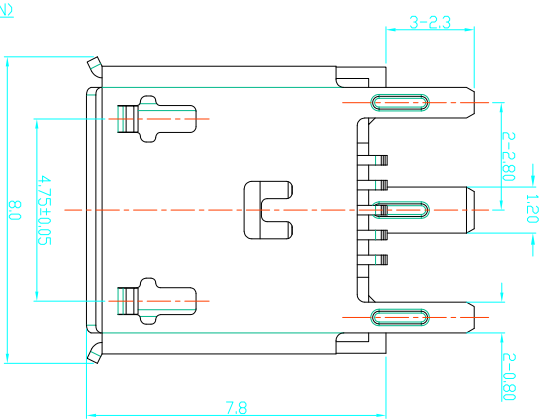
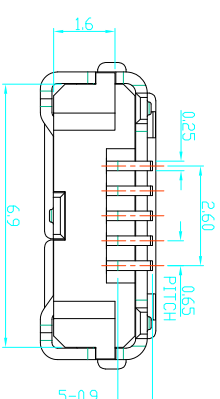


REV.	ECN. NO.	APPD.

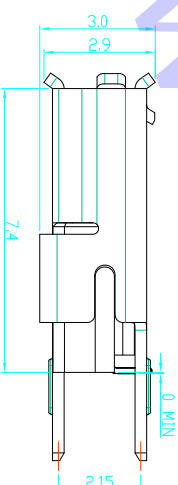

RECOMMEND PCB LAYOUT(THICKNESS=1.6mm)
TOLERANCE: ±0.05

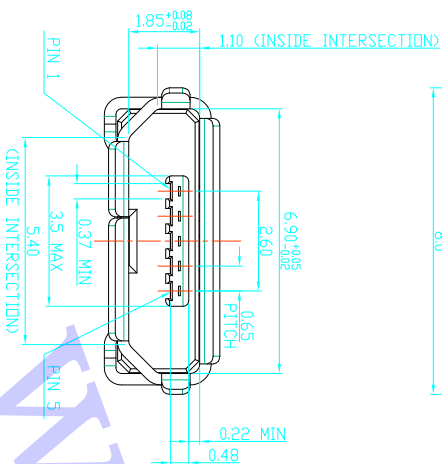

Notes:

Specifications:

1. Current rating: 1 A Max.
2. Dielectric withstanding:voltage: 100V(AC) for 1 min.
3. Contact resistance: 50mΩ Max.
4. Insulation resistance: 100MΩ Min.
5. Total mating force: 3.57 Kgf Max.
6. Total unmating force: 1.0 Kgf Min.0.81~2.05 Kgf Min.after 10000 Insertion/extraction cycles
7. Temperature range: -30°C~+80°C



X	±0.50	X°	±2°	UNITS	深圳市创粤科技有限公司 MICRO USB 5P B型 立式贴片7.8MM
	±0.30	X°	±1°	mm	
	±0.10	X°	±0.5°	MAT'L	
XXX	±0.05				
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF SHENZHEN CHUANGYAO TECHNOLOGY CO.,LTD. NO PARTS OF THIS DOCUMENT ARE TO BE REPRODUCED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF SHENZHEN CHUANGYAO TECHNOLOGY CO., LTD.					
				FINISH	
				QTY	
DR:	2018/10/07	APPD:		DWG NO.:	
		CHKD:		CY-BMF5-5PC-780	
				SCALE	1/1
				SHEET	1/1
				REV.	A1